

DE Treppenlicht-Zeitschalter
GB Time-lag switch



TA220d

		230V~ 50/60Hz					
		16A/250V~ $\mu \cos \varphi = 1$	2000W	1000VA*	2000W	1000W	500W
		max. 50mA / 230V~					
	P	1 W	2000W	—	—	—	
		100 m	<p>* DE Parallelkompensation: $C \leq 100 \mu\text{F}$ GB Parallel compensation: $C \leq 100 \mu\text{F}$</p>				
		-10°C ... +55°C					
		-10°C ... +60°C					

DE Funktion
GB Function

0,5 - 12 min

AUTO

MAN

DE 3/4 Leiter Anschlußbeispiele
GB 3 / 4 conductor, example connections

230 V~









8 - 230 V \cong

DE Sicherheitshinweise:

Dieses Produkt darf nur durch eine Elektrofachkraft installiert werden, anderenfalls besteht Brandgefahr oder Gefahr eines elektrischen Schlages. Vor der Installation die Bedienungsanleitung lesen, den produktspezifischen Montageort beachten und nur Originalzubehör benutzen. Alle Produkte dürfen ausschließlich von speziell geschulten Mitarbeitern geöffnet und repariert werden. Durch unbefugte Öffnung oder Reparatur erlöschen alle Haftungs-, Ersatz- und Gewährleistungsansprüche.

GB Safety notes

This product should preferably be installed by a qualified electrician. Non-compliance may result in a fire hazard or electric shocks. Before installation, read the operating instructions and observe the product-specific requirements for the installation location. Use only original spare parts for repair and maintenance. All products may be opened and repaired only by specially trained personnel. Unauthorised opening and repair by other persons will invalidate all claims for liability, replacement or warranty services.

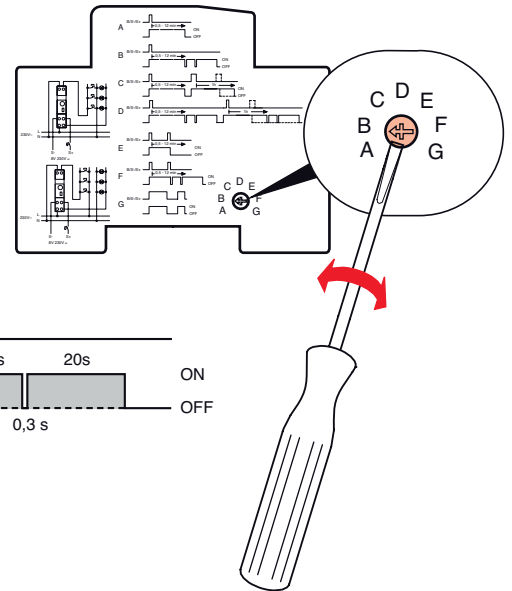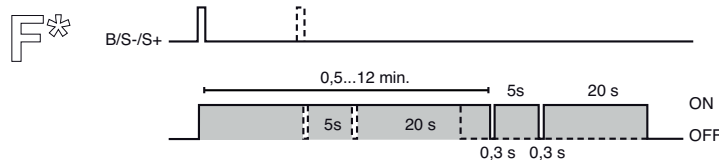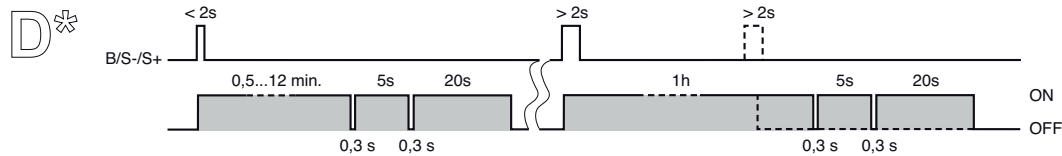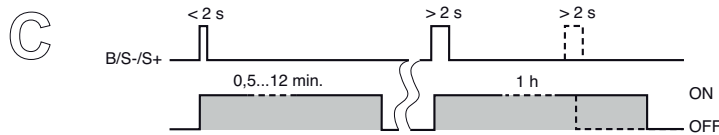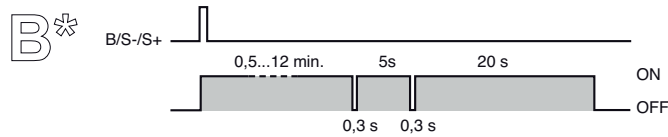

*
DE Bei Leuchtstofflampen und Energiesparlampen wird die Unterbrechungszeit (0,3s) durch den Neustart der Lampen verlängert.
GB For fluorescent lamps and energy-saving lamps, the break time (0.3 s) is extended by the lamp restart time.